

COMMERCIAL LIGHTING



Benson Energy Saving Technology

Recessed Down Light

Commercial Lighting






IP65 Waterproof COB LED Recessed Down Light



Specification

IP65 Waterproof COB LED Recessed Down Light	
LED Chip	COB
CCT	2700K-5000K (Optional)
IP Code	IP65
Beam Angle	50°
CRI	80Ra/ 90Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

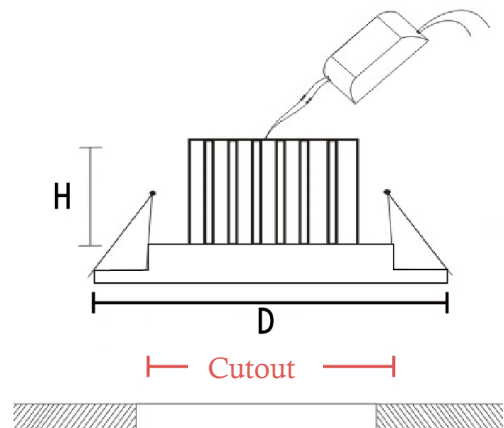

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Cutout (mm)	Beam Angle	CRI
BEST-RDL-IP65-15W	15	90	1350	2700K-5000K	D115 H78	70	50°	80/90 Ra
BEST-RDL-IP65-20W	20	90	1900	2700K-5000K	D135 H80	75	50°	80/90 Ra
BEST-RDL-IP65-30W	30	90	2700	2700K-5000K	D170 H95	85	50°	80/90 Ra
BEST-RDL-IP65-40W	40	90	3600	2700K-5000K	D195 H105	120	50°	80/90 Ra
BEST-RDL-IP65-50W	50	90	4500	2700K-5000K	D220 H130	145	50°	80/90 Ra




COB LED Recessed Down Light



Specification

COB LED Recessed Down Light	
LED Chip	COB
CCT	2700K-5000K (Optional)
IP Code	IP20
Beam Angle	20°~45°
CRI	80Ra/ 90Ra/ 97Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

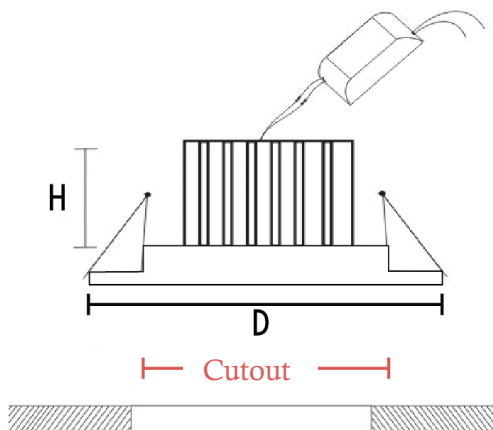

Height	Dimension	Illuminance
1m		426LX
2m		124LX
3m		43LX
4m		23LX
5m		15LX

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Cutout (mm)	Beam Angle	CRI
BEST-RDL-5W	5	100	500	2700K-5000K	D85 H68	70	20°/45°	80/90/97 Ra
BEST-RDL-7W	7	100	700	2700K-5000K	D85 H68	75	20°/45°	80/90/97 Ra
BEST-RDL-12W	12	100	1200	2700K-5000K	D100 H87	85	20°/45°	80/90/97 Ra
BEST-RDL-20W	20	100	2000	2700K-5000K	D140 H105	120	20°/45°	80/90/97 Ra
BEST-RDL-30W	30	100	3000	2700K-5000K	D175 H115	145	20°/45°	80/90/97 Ra




COB LED Recessed Down Light


Specification



COB LED Recessed Down Light	
LED Chip	COB
CCT	2700K-5000K (Optional)
IP Code	IP20
Beam Angle	24°
CRI	80Ra/ 90Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

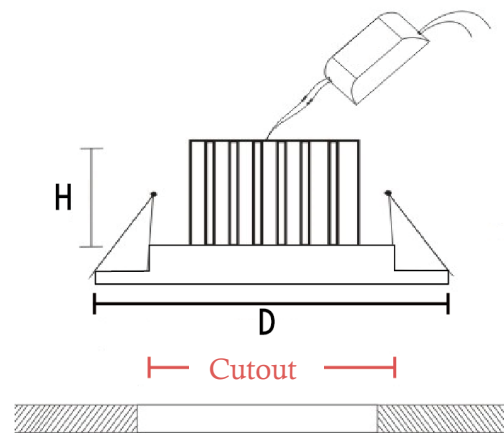

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Cutout (mm)	Beam Angle	CRI
BE-KS93433	12	110	1320	2700K-5000K	D115 H70	95	20°/45°	80/90 Ra
BE-KS93435	20	110	2200	2700K-5000K	D170 H80	150	20°/45°	80/90 Ra

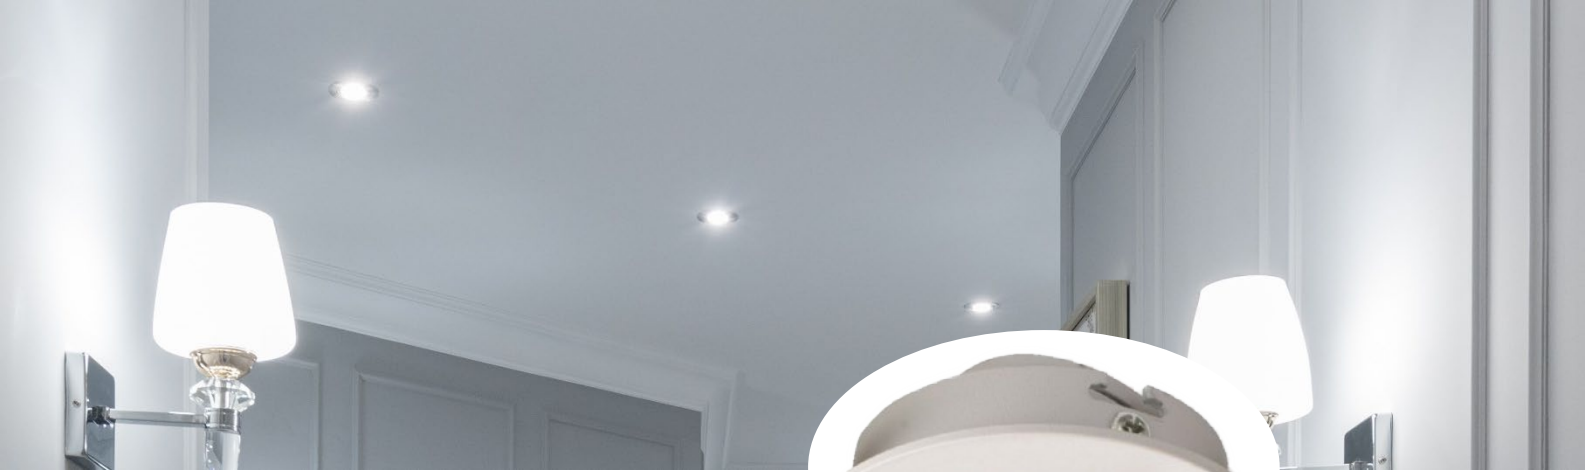


SUPER THIN – COB LED Recessed Down Light



Specification

SUPER THIN - COB LED Recessed Down Light	
LED Chip	COB
CCT	2700K-5000K (Optional)
IP Code	IP20
Beam Angle	24°
CRI	85Ra/ 90Ra/ 97Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

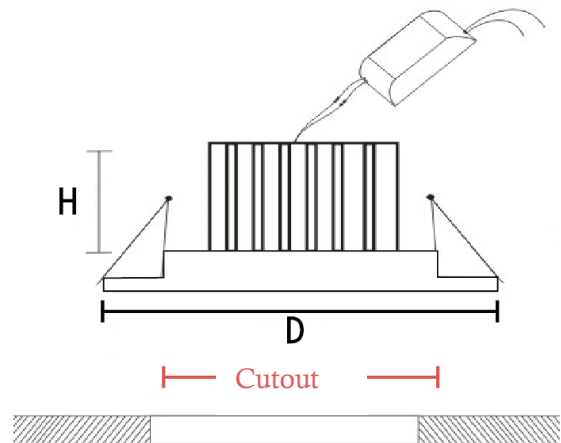

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Cutout (mm)	Beam Angle	CRI
BE-KS93433	12	110	1320	2700K-5000K	D115 H70	95	20°/45°	85/90/97 Ra
BE-KS93435	20	110	2200	2700K-5000K	D170 H80	150	20°/45°	85/90/97 Ra




COB LED Mini Recessed Down Light



Specification

COB LED Mini Recessed Down Light Series	
LED Chip	COB
CCT	2700K-5000K (Optional)
IP Code	IP20
Beam Angle	24°
CRI	80Ra/ 90Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

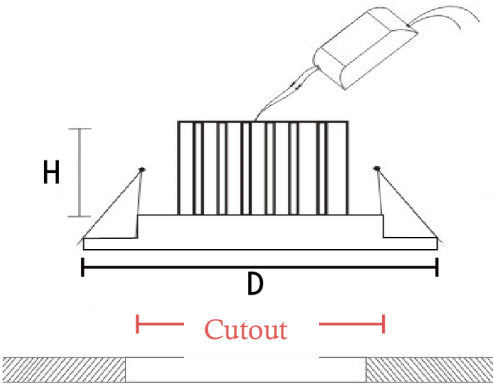

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Cutout (mm)	Beam Angle	CRI
BE-KS93433	12	110	1320	2700K-5000K	D115 H70	40	24°	80/90 Ra
BE-KS93435	20	110	2200	2700K-5000K	D170 H80	40	24°	80/90 Ra




Adjustable COB Mini Recessed Down Light



Specification

Adjustable COB Mini Recessed Down Light	
LED Chip	COB
CCT	2700K-5000K (Optional)
IP Code	IP20
Beam Angle	30°
CRI	80Ra/ 90Ra/ 97Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

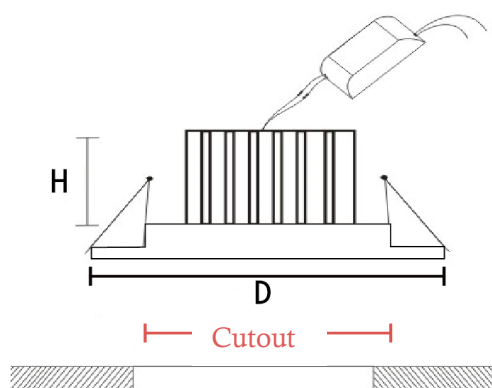

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Cutout (mm)	Beam Angle	CRI
BE-KD073	1	100	100	2700K-5000K	D50 H18	45	30°	80/90 Ra
BE-KD074	1	100	100	2700K-5000K	D68 H26	45	30°	80/90 Ra




SMD LED Recessed Down Light



Specification

SMD LED Recessed Down Light	
LED Chip	SMD
CCT	3000K±300K
IP Code	IP20
Beam Angle	120°
CRI	>82Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.93
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

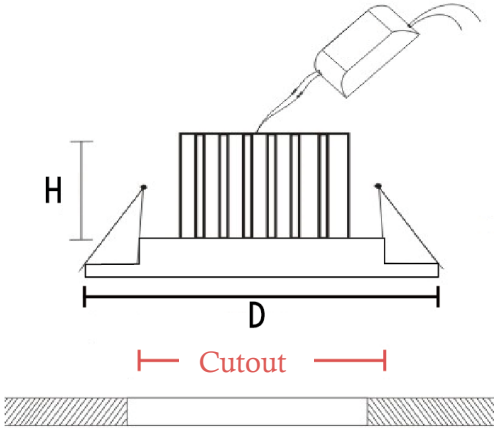

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Cutout (mm)	Beam Angle	CRI
BEST-DL-3005	15	80	1200	3000K±300K	D190 H85	180	160°	>82




SMD LED Recessed Down Light



Specification

SMD LED Recessed Down Light	
LED Chip	SMD
CCT	2700K-5000K (Optional)
IP Code	IP20
Beam Angle	120°
CRI	80Ra/ 90Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.93
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

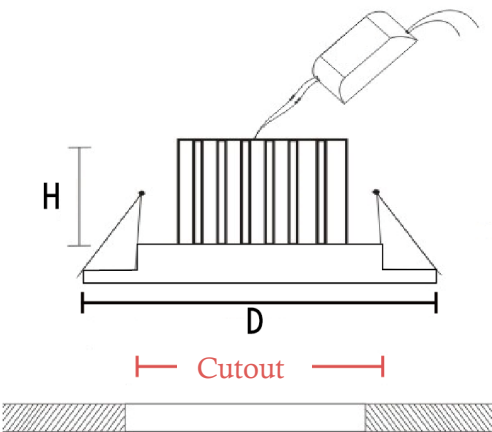

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Cutout (mm)	Beam Angle	CRI
BEST-RDL-10W	10	120	1200	2700K-5000K	D125 H52	100	120°	80/90
BEST-RDL-15W	15	120	1800	2700K-5000K	D145 H65	120	120°	80/90
BEST-RDL-20W	20	120	2400	2700K-5000K	D180 H72	150	120°	80/90
BEST-RDL-25W	25	120	3000	2700K-5000K	D195 H80	170	120°	80/90
BEST-RDL-30/35W	30/35	120	3600/4200	2700K-5000K	D230 H90	200	120°	80/90




Adjustable CMD Mini Recessed Down Light



Specification

Adjustable CMD Mini Recessed Down Light	
LED Chip	SMD
CCT	3000K/ 6000K (Optional)
IP Code	IP20
Beam Angle	120°
CRI	85Ra/ 90Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.93
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

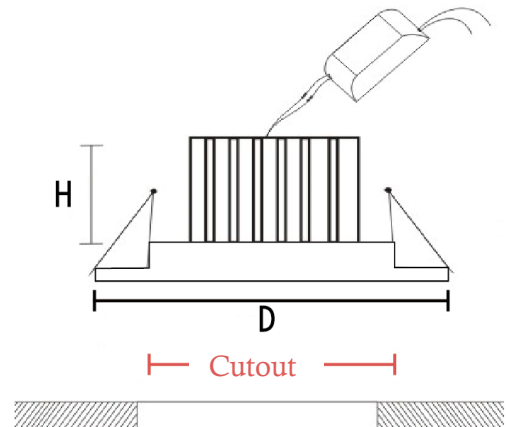

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Cutout (mm)	Beam Angle	CRI
BE-KD076	1	100	100	3000K/ 6000K	D76 H20	58	120°	85/90 Ra




High Tube COB LED Recessed Down Light



Specification

High Tube COB LED Recessed Down Light	
LED Chip	COB
CCT	2700K-5000K (Optional)
IP Code	IP20
Beam Angle	24°
CRI	80Ra/ 90Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.93
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

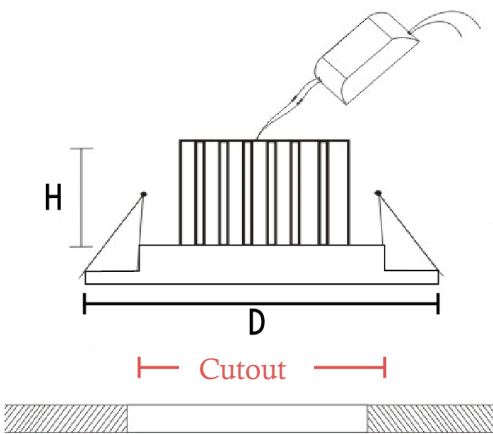

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Cutout (mm)	Beam Angle	CRI
BE-KS53109	12	90	1080	2700K-5000K	D105 H120	95	24°	80/90




Metal COB LED Recessed Down Light



Specification



Metal COB LED Recessed Down Light	
LED Chip	COB
CCT	2700K-5000K (Optional)
IP Code	IP20
Beam Angle	24°
CRI	80Ra/ 90Ra/ 97Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

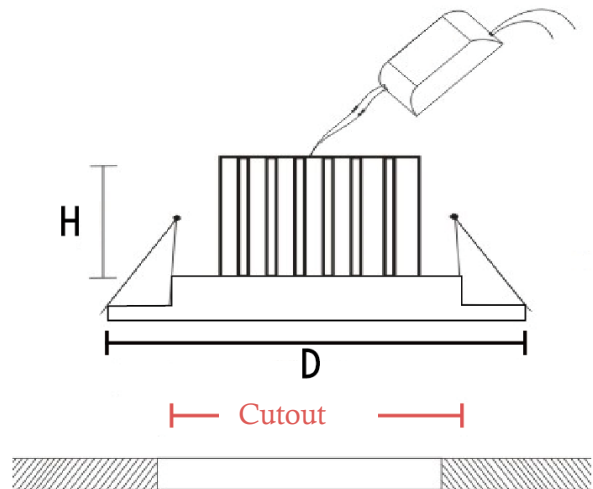

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Cutout (mm)	Beam Angle	CRI
BEHD-SDH-7W-NR	7	85	595	2700K-5000K	D90 H95	78	24°	80/90/97 Ra
BEHD-SDH-10W-NR	10	85	850	2700K-5000K	D90 H110	78	24°	80/90/97 Ra
BEHD-SDH-15W-NR	15	85	1275	2700K-5000K	D109 H122	92	24°	80/90/97 Ra
BEHD-SDH-20W-NR	20	85	1700	2700K-5000K	D109 H122	92	24°	80/90/97 Ra
BEHD-SDH-30W-NR	30	85	2550	2700K-5000K	D135 H153	130	24°	80/90/97 Ra
BEHD-SDH-40W-NR	40	85	3400	2700K-5000K	D230 H200	210	24°	80/90/97 Ra
BEHD-SDH-50W-NR	50	85	4250	2700K-5000K	D230 H200	210	24°	80/90/97 Ra

Surface Down Light

Commercial Lighting






Straight Type Surface Down Light



Specification

Surface Down Light	
LED Chip	COB
CCT	2700K-5000K (Optional)
IP Code	IP54
Beam Angle	20°/45°
CRI	80Ra/ 90Ra/ 97Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

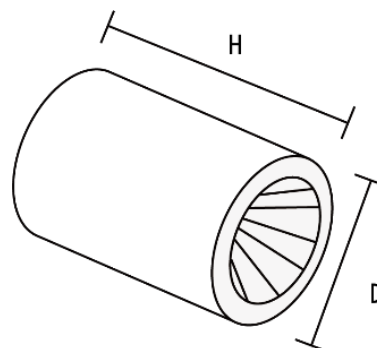

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	Beam Angle	CCT (K)	Dimension (mm)	CRI (Ra)
BEST-SDL-7W-R	7	100	700	20°/45°	2700K-5000K	D90 H90	80/90/97
BEST-SDL-12W-R	12	120	1200	20°/45°	2700K-5000K	D110 H120	80/90/97
BEST-SDL-20W-R	20	120	2000	20°/45°	2700K-5000K	D130 H152	80/90/97
BEST-SDL-30W-R	30	100	3000	20°/45°	2700K-5000K	D170 H185	80/90/97
BEST-SDL-40W-R	40	120	4000	20°/45°	2700K-5000K	D193 H193	80/90/97




Square Type Surface Down Light



Specification

Surface Down Light	
LED Chip	COB
CCT	2700K-5000K (Optional)
IP Code	IP54
Beam Angle	20°/45°
CRI	80Ra/ 90Ra/ 97Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

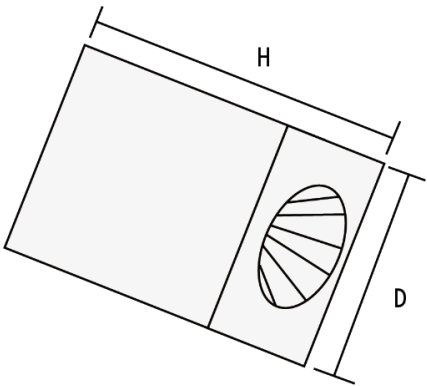

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	Beam Angle	CCT (K)	Dimension (mm)	CRI (Ra)
BEST-SDL-7W-R	7	100	700	20°/45°	2700K-5000K	D90 H90	80/90/97
BEST-SDL-12W-R	12	120	1200	20°/45°	2700K-5000K	D110 H120	80/90/97
BEST-SDL-20W-R	20	120	2000	20°/45°	2700K-5000K	D130 H152	80/90/97
BEST-SDL-30W-R	30	100	3000	20°/45°	2700K-5000K	D170 H185	80/90/97
BEST-SDL-40W-R	40	120	4000	20°/45°	2700K-5000K	D193 H193	80/90/97

Track Light

Commercial Lighting






Obsidian Track Light




Specification



Obsidian Track Light (Black/White)	
LED Chip	COB
CCT	2700K-5000K (Optional)
IP Code	IP20
Beam Angle	20°/45°
CRI	80Ra/ 90Ra/ 97Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	Internal LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

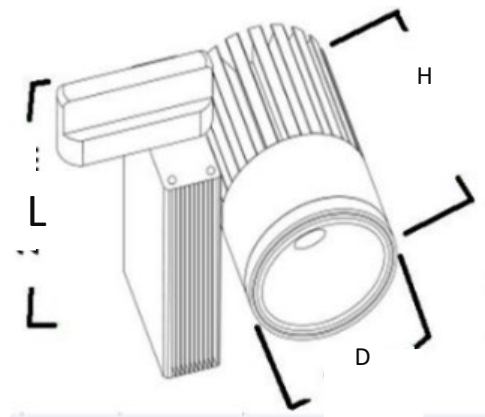

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Cutout (mm)	Beam Angle	CRI
BEST-TL-30W-B	7	90	595	2700K-5000K	D100 H125 L200	78	24°/45°	80/90/97 Ra
BEST-TL-46W-B	10	90	850	2700K-5000K	D100 H170 L200	78	24°/45°	80/90/97 Ra




Noble Track Light



Specification

Noble Track Light (Black/White)	
LED Chip	COB
CCT	2700K-6000K (Optional)
IP Code	IP20
Beam Angle	24°
CRI	80Ra/ 90Ra/ 97Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

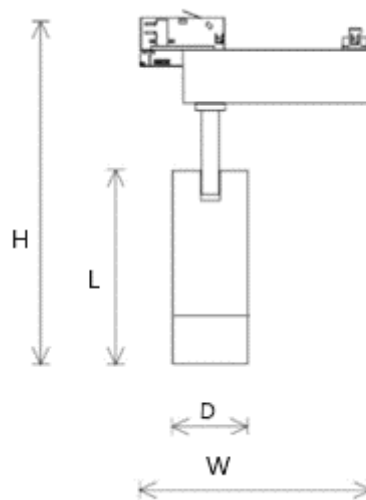


Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Beam Angle	CRI
BEHD-TL-15WC01	15	100	1500	2700K-6000K	D60 H145	24°	80/90/97 Ra
BEHD-TL-20WC01	20	100	2000	2700K-6000K	D70 H160	24°	80/90/97 Ra
BEHD-TL-25WC01	25	100	2500	2700K-6000K	D70 H160	24°	80/90/97 Ra
BEHD-TL-30WC01	30	100	3000	2700K-6000K	D70 H190	24°	80/90/97 Ra
BEHD-TL-35WC01	35	100	3500	2700K-6000K	D80 H190	24°	80/90/97 Ra



Adjustable Track Light

Specification

Adjustable Track Light (Black/White)	
LED Chip	COB
CCT	2700K-6000K (Optional)
IP Code	IP20
Beam Angle	15°~45°
CRI	80Ra/ 90Ra/ 97Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

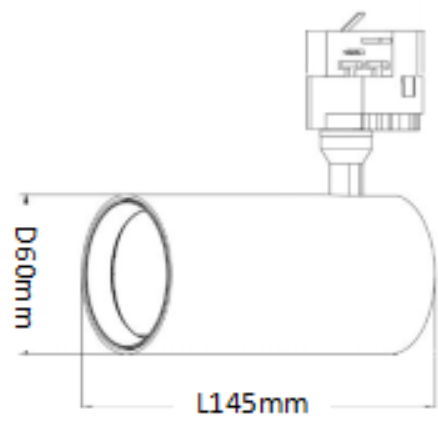

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Beam Angle	CRI
BEST-TL-20W-A03-N	12	100	1200	2700K-6000K	D60 H145	15°~45°	80/90/97 Ra




Nordic Style Track Light



Specification




Nordic Style Track Light (Black/White)	
LED Chip	COB
CCT	2700K-6000K (Optional)
IP Code	IP20
Beam Angle	15°/24°
CRI	80Ra/ 90Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

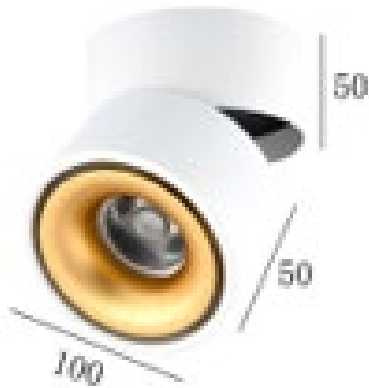


Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Beam Angle	CRI
BEHD-TL-12W-RA	12	70	850	2700K-6000K	D100 H100	15°/24°	80/90 Ra

LED Linear Track Light

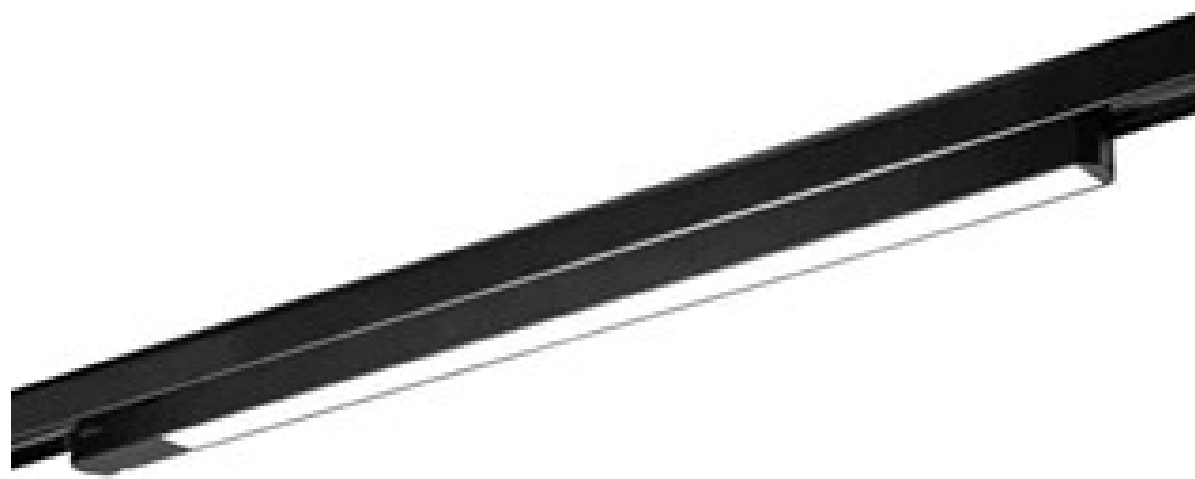


Specification

LED Linear Track Light (Black/White)	
CCT	2700K-6000K (Optional)
IP Code	IP20
Beam Angle	120°
CRI	80Ra/ 90Ra
Input Voltage	AC 100-240V, 50/60 Hz
Power Factor	PF>0.9
LED Driver	External LED Driver (Lifud/Philips)
Dimming	0,1-10V/DALI/TRIAC Dimmable LED Driver

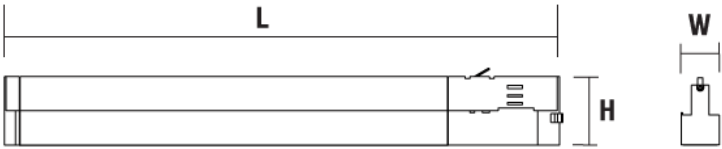

Item No.	Watt (W)	Efficacy (lm/W)	Lumen (lm)	CCT (K)	Dimension (mm)	Beam Angle	CRI
BEST-TL-10W-L01	10	100	1000	2700K-6000K	H48 W31 L300	120°	80/90 Ra
BEST-TL-20W-L01	20	100	2000	2700K-6000K	H48 W31 L600	120°	80/90 Ra
BEST-TL-30W-L01	30	100	3000	2700K-6000K	H48 W31 L1000	120°	80/90 Ra
BEST-TL-40W-L01	40	100	3000	2700K-6000K	H48 W31 L1000	120°	80/90 Ra


Four wire square track




Four wire square track	
Color	White, Black, Gray
Lnegth	1M/ 1.5M/ 2M/ 3M
Dimmable	Support dimming LED driver

Compatible with STAFF, EUTRAC, NORDIC, GLOBAL, Nucco, and IVELA track

Accessories

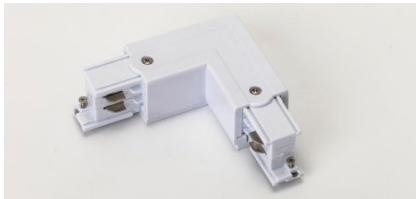

L-connector

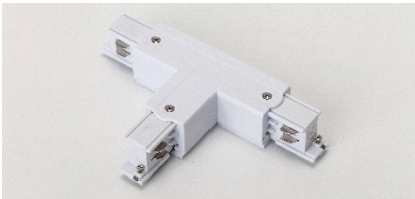

T-connector




Suspension kit




Power connector-End cap




I mini connector

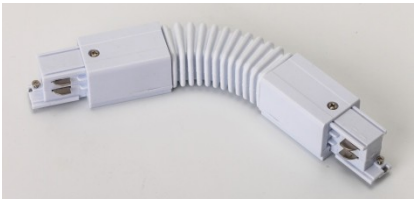

L Rigid connector

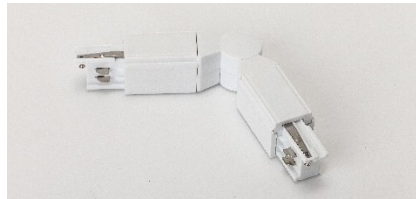

I flexible connector

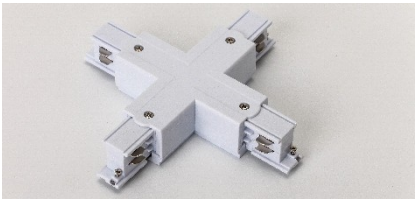

X-connector



I-connector



Website



Email : service@best-engerysaving-tech.com

Tel : +886-6-3128310

Fex : +886-6-3121809

Add. : 18F., No.689-96, Xiaodong Rd., Yongkang Dist.,
Tainan City 710, Taiwan(R.O.C)